



10 E Doty St #300 | Madison, WI 53703 | 608-251-0706



openingdesign
312 W. Lakeside St. | Madison, WI 53715 | 773-425-6456

1 S. Pinckney St.
Suite 930

Floor Plans

Elevations

Schedules

A-100

Scale As indicated

Demolition Plan (6C)

1/4" = 1'-0"


Floor Plan (4C)

1/4" = 1'-0"

Reflected Ceiling Plan (29)

1/4" = 1'-0"


The figure consists of three detailed architectural drawings of a building suite, labeled 6C, 4C, and 29 from left to right.
 - **Demolition Plan (6C):** Shows the existing floor plan with various rooms and fixtures. It includes a 'GENERAL DEMO NOTES' box and specific instructions for demolition, such as 'REMOVAL OF EXISTING GRIDLIGHTING' and 'REMOVAL OF EXISTING WALLS'. A 'GRAY AREA' is highlighted for salvaging tile/grids/diffusers.
 - **Floor Plan (4C):** Provides a detailed view of the room layouts, including 'EXISTING CONF.', 'EXISTING OFFICE', 'MEETING ROOM', 'STORAGE', and 'EXISTING MACHINES ROOM'. It shows door locations, fixture types, and room dimensions like '180 SQF' and '213 SQF'.
 - **Reflected Ceiling Plan (29):** Shows the ceiling grid and lighting fixtures. It indicates 'CEILING HEIGHT: EXISTING (RETAIN EXISTING GRID/LIGHTING)' and 'CEILING HEIGHT: 8'-7"'. Labels include 'EXISTING BULKHEAD', 'EXISTING BULKHEAD', 'EXISTING BULKHEAD', 'EXISTING BULKHEAD', and 'EXISTING BULKHEAD'. A north arrow is present in the bottom right corner.

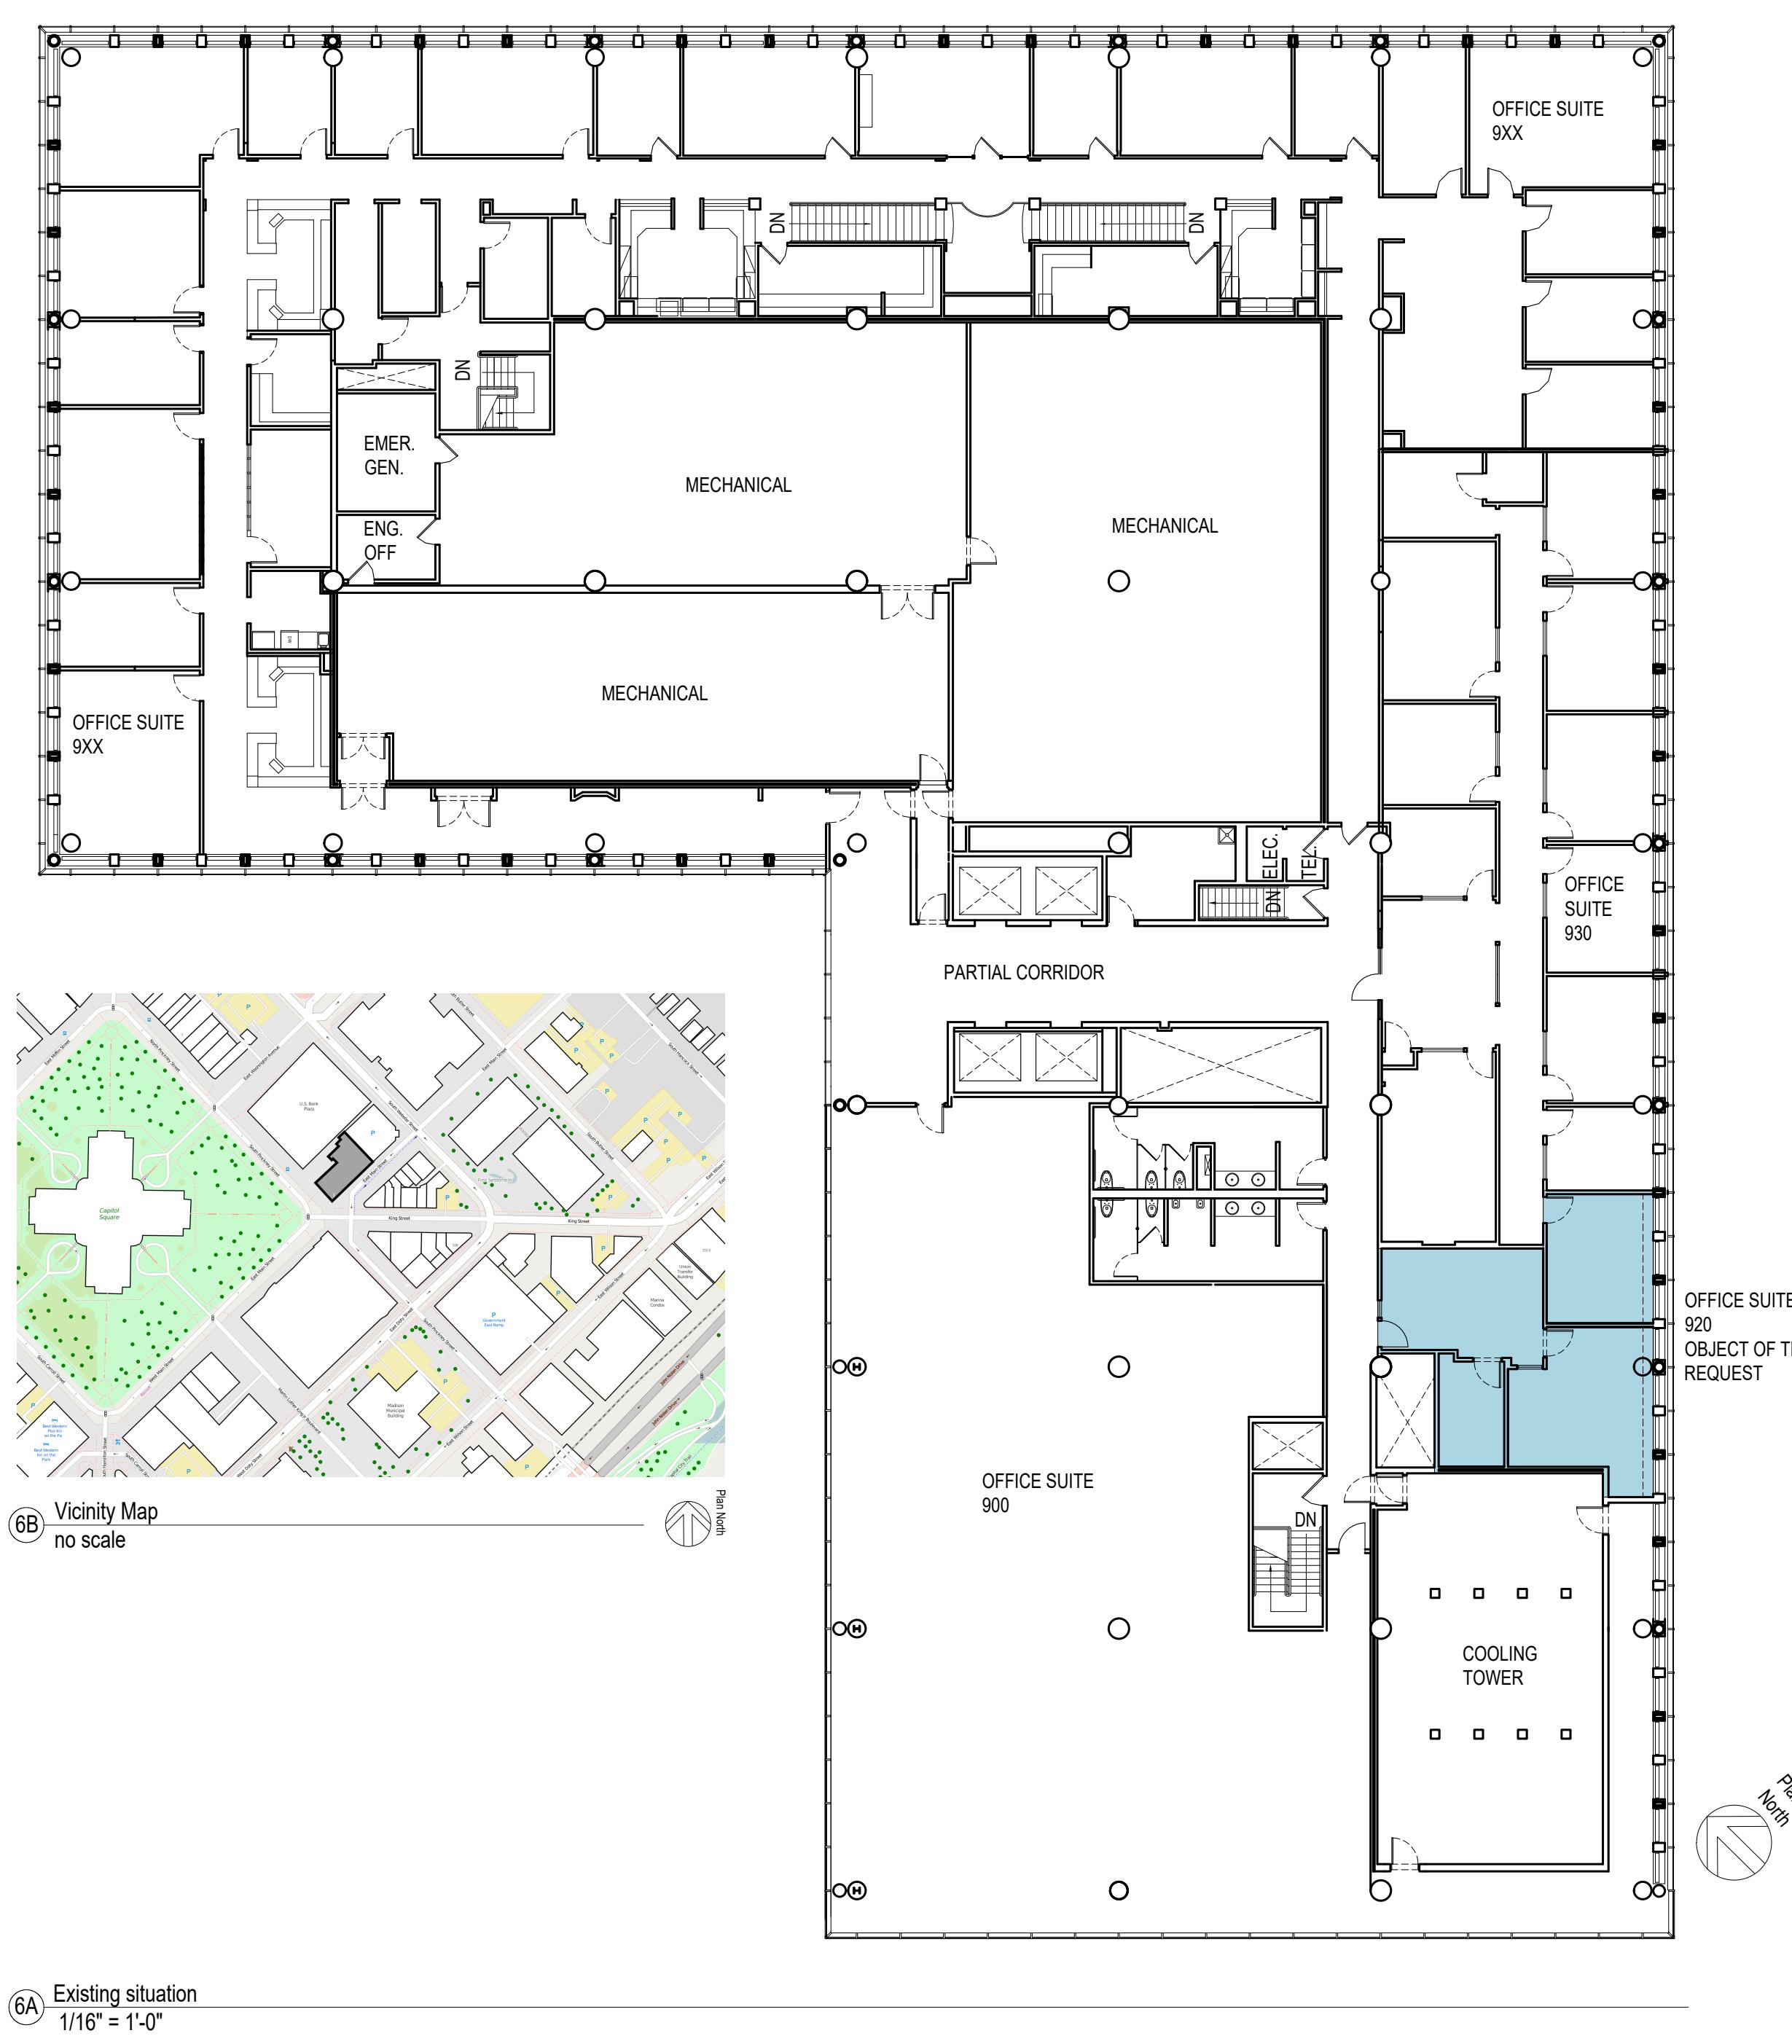

FINISH ROOM SCHEDULE			
ROOM	FLOOR	BASE	WALLS
CORRIDOR EXTENSION	CARPET - SIMILAR TO EXISTING	WOOD - MATCH EXISTING	PAINT TBD
MEETING ROOOM	CARPET - SIMILAR TO EXISTING	WOOD - MATCH EXISTING	PAINT TBD
OFFICE 1	CARPET - SIMILAR TO EXISTING	VINYL - MATCH EXISTING	PAINT TBD
OFFICE 2	CARPET - SIMILAR TO EXISTING	VINYL - MATCH EXISTING	PAINT TBD
STORAGE	CARPET - SIMILAR TO EXISTING	VINYL - MATCH EXISTING	PAINT TBD


DOOR SCHEDULE			
LOCATION	WIDTH	HEIGHT	TYPE
CORRIDOR / MEETING ROOM	3'-0"	8'-7" (MATCH)	WOOD - REUSE OR MATCH
CORRIDOR / OFFICE 1	3'-0"	8'-7" (MATCH)	WOOD - EXISTING
CORRIDOR / OFFICE 2	3'-0"	8'-7" (MATCH)	WOOD - REUSE OR MATCH
CORRIDOR / STORAGE	3'-0"	8'-7" (MATCH)	WOOD - REUSE OR MATCH

LIGHT FIXTURE SCHEDULE		
LOCATION	QUANTITY	TYPE
CORRIDOR EXTENSION	2	REUSE EXISTING CAN LIGHT FIXTURES
MEETING ROOM	4	REUSE EXISTING 2x4 LIGHTING FIXTURES
OFFICE 1	2	EXISTING 2x4 LIGHTING FIXTURES
OFFICE 2	4	EXISTING 2x4 LIGHTING FIXTURES
STORAGE	2	REUSE EXISTING 2x4 LIGHTING FIXTURES

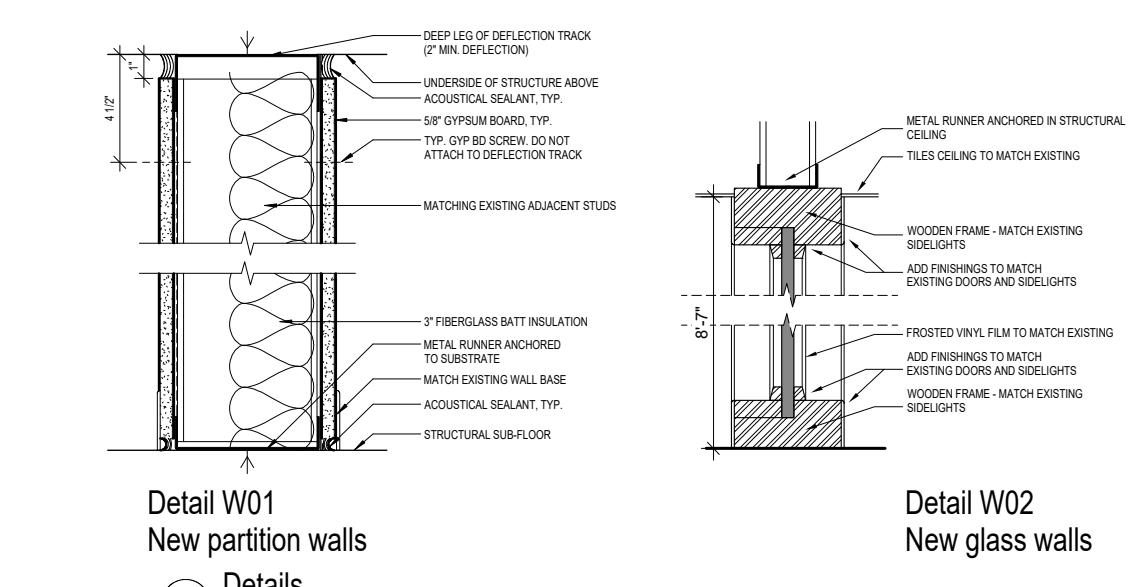

Detail W01
New partition walls

Detail W02
New glass walls

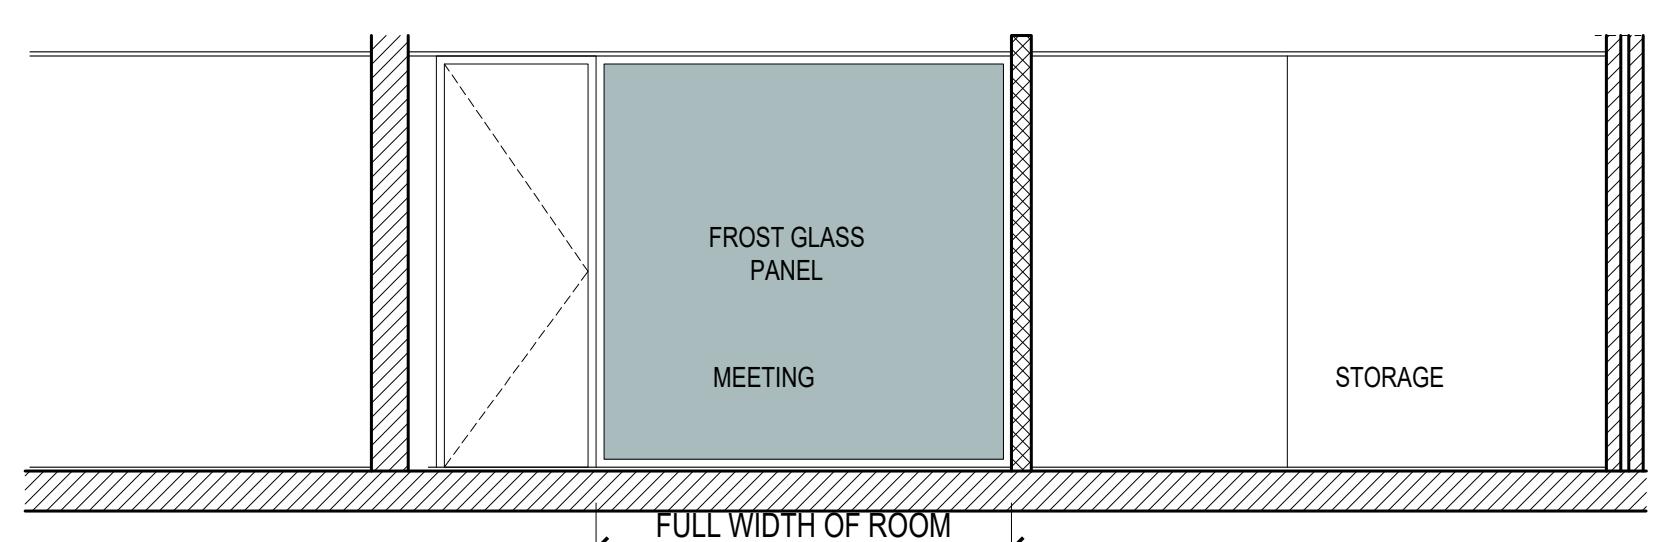

2A Elevation
1/4" = 1'-0"

